



# G3

## POLYPOOL GROUT

Water resistant grout for swimming pool tile joints.

**GROUT WATERPROOFING SWIMMING POOL**

Polypool Grout is a cementitious mortar adhesive with high abrasion/resistance for joints up to 6 mm composed of hydraulic binders, selected aggregates and special additives . It is supplied as a dry powder in vpre-weighed bags ready to use on site, which requires only addition of clean water to produce easily workable mortar. Pool Grout is ideal for jointing of Ceramic Tiles, Marbles.

### DESCRIPTION

POLYPOOL GROUT is a cementitious mortar adhesive with high abrasion/resistance for joints up to 6 mm composed of hydraulic binders, selected aggregates and special additives . It is supplied as a dry powder in pre-weighed bags ready to use on site, which requires only addition of clean water to produce easily workable mortar. Pool Grout is ideal for jointing of Ceramic Tiles, Marbles.

### ADVANTAGES

- Water-resistant (suitable for swimming pools).
- Self-colored.
- Resistant to cracking in joints up to 6mm wide.
- Ideal for internal and exterior applica- tions.
- Requires only addition of water on-site at the time of usage

### STANDARDS:

- BS: EN 13888
- ISO 13007-3

### APPLICATION PROCEDURES:

Allow at least 24 hours between fixing tiles and grouting. Mix grout powder with water to give a smooth, thick consistency. Leave to stand for 10 minutes before using. Apply to tile joints with a squeegee, brush or sponge. Remove surplus grout with a damp sponge. When grouting is completed, polish tiles with a dry cloth.

### Advantages

Appearance:	White viscous liquid
PH:	4-5
Specificgravity@25 ° C:	1.0-1.05

### PACKAGING:

POLYPOOL GROUT is available in 10 and 20kg sacks.


### STORAGE:

Store out of direct sunlight, clear of the ground on pallets protected from rain- fall. Avoid excessive compaction.

### CAUTIONS:

- Health and Safety:As POLYGROUT contains Portland cement, POLYGROUT may cause irritation to skin or eyes. In case of accidental contact with eyes, immediately flush with plenty of water for at least 10 minutes and seek medical advice if necessary.

**FOR MORE INFORMATION, PLEASE CONTACT PHONE NO. 00966 2 6204224**

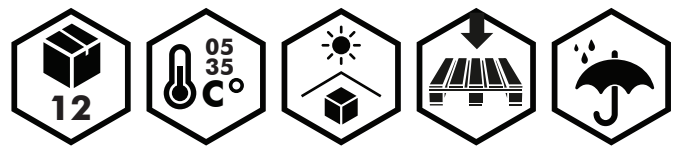

**LEGAL DISCLAIMER:** Polywed endeavors to ensure that any advice, recommendations, information it may give, is accurate and correct. It cannot accept any liability either directly or indirectly arising from the use of its products, because it has no direct or continuous control over where or how its products are applied, whether or not in accordance with any advice, specification, recommendation or information given by us. Polywed has the right to change any of the specifications mentioned in the Technical data sheets upon its discretion without prior notification. Hard copies of the Technical Data sheets are printed once or twice a year, while our technical data sheets are continuously being updated as per R&D improvements and new 3rd party testing; kindly refer to our website for the latest updated of the technical Data Sheets.